

Switch Amplifiers

For limit switch contact assemblies with inductive limit switch assembly
- intrinsically safe -

KF..-SR2 ..

Application

These switch amplifiers are suitable for intrinsically safe applications. The instruments transfer binary signals of limit switch contact assemblies preferably with inductive limit switch assemblies (NAMUR-sensors), from the potentially explosive area into the secure area.

The proximity sensor or switch controls the load in the secure area via a change-over relay contact. The output changes the status if the status of the input signal is being changed. The normal output status can be reversed via switch S1. Switch S3 is being used to switch the lead error detection of the field circuitry on or off. During the error status the relays fall and the error is being indicated via the LAD according to NAMUR NE44.

Instruments with bistable relays (KFA6-SR2-Ex2.W.IR) are being applied for filling level- and pump control and in other switch applications. The instrument is being set by an active signal at input I and is being reset by an active signal at input II. The direction of action of the inputs I and II is programmable.

The lead error control of the field circuitry is being switched on and off via switch 3. During an error condition or an power failure the change-over relay contact falls and the error is being displayed via NAMUR NE 44. If the lead error is remedied, the relay backspaces in the condition of the error indication.

If the instrument is being supplied with energy after the power failure, the relays backspace into the initial status.




SIL 2

Versions


Mains voltage	1-channel	2-channel	bistable
AC 230 V	KFA6-SR2-Ex1.W	KFA6-SR2-Ex2.W	KFA6-SR2-Ex2.W.IR
AC 115 resp. DC 24 V upon request			

Front Views


KFA6-SR2-Ex1.W (1-channel)

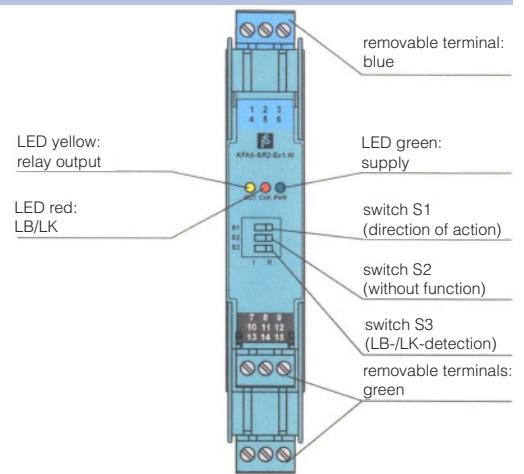

KFA6-SR2-Ex2.W (2-channel)

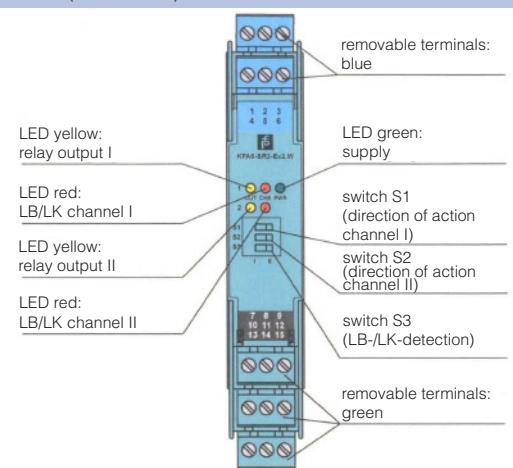

KFA6-SR2-Ex2.W.IR (2-channel, bistable)

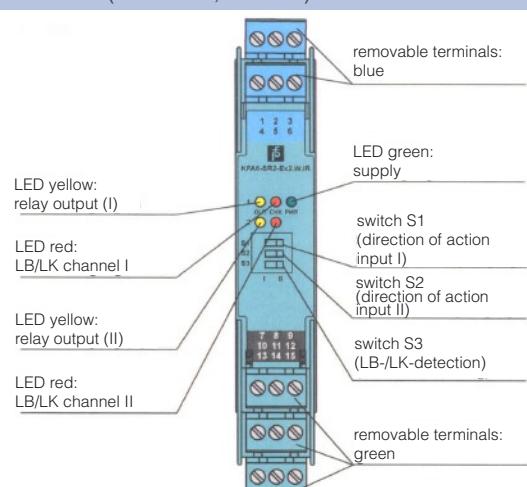

Sales and Export South, West, North

ARMATURENBAU GmbH

Manometerstraße 5 • D-46487 Wesel - Ginderich
Tel.: +49 (0)28 03/91 30-0 • Fax: +49 (0)28 03/10 35
armaturenbau.com • mail@armaturenbau.com

Subsidiary Company, Sales and Export East

MANOTHERM Beierfeld GmbH

Am Gewerbepark 9 • D-08344 Grünhain-Beierfeld
Tel.: +49 (0)37 74/58-0 • Fax: +49 (0)37 74/58-545
manotherm.com • mail@manotherm.com


9532

03/11


Connection and Configuration

Connection


KFA6-SR2-Ex1.W

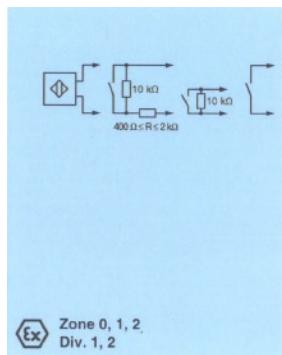

KFA6-SR2-Ex2.W

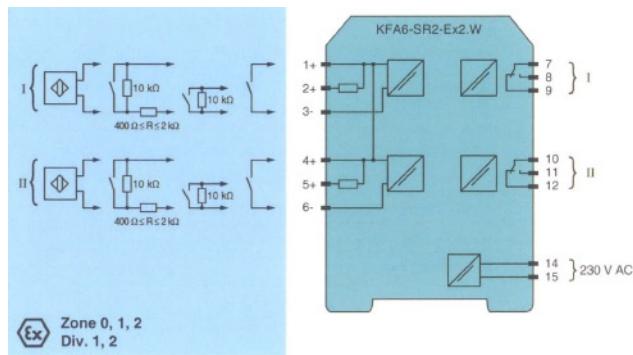


KFA6-SR2-Ex2.W.IR

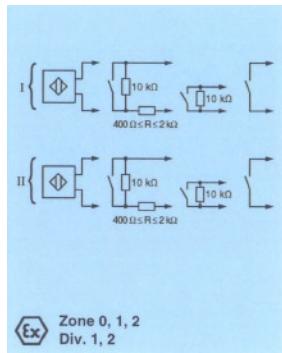

Configuration

KFA6-SR2-Ex1.W

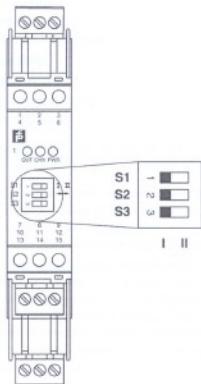

Switch position


S	Function	Position
1	direction of action output I (relay) tightened	I II
	for high input current for low input current	
2	no function	
3	lead error detection	ON OFF

Operating conditions

Control circuit	Input signal
initiator high ohmic contact opened	low input current
initiator low ohmic contact closed	high input current
cable break short circuit on line	lead error

adjusted ex works: switch 1, 2, and 3 on position I

KFA6-SR2-Ex2.W

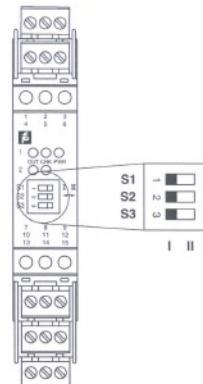

Switch position


S	Function	Position
1	direction of action output I (relay) tightened	I II
	for high input current for low input current	
2	direction of action output II (relay) tightened	I II
3	lead error detection	ON OFF

Operating conditions

Control circuit	Input signal
initiator high ohmic contact opened	low input current
initiator low ohmic contact closed	high input current
cable break short circuit on line	lead error

adjusted ex works: switch 1, 2, and 3 on position I

KFA6-SR2-Ex2.W.IR

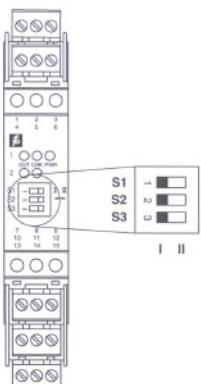

Switch position

S	Function	Position
1	direction of action output I (relay) tightened	I II
	for high input current for low input current	
2	direction of action output II (relay) tightened	I II
	for high input current for low input current	
3	lead error detection	ON OFF

Operating conditions

Control circuit	Input signal
initiator high ohmic contact opened	low input current
initiator low ohmic contact closed	high input current
cable break short circuit on line	lead error

adjusted ex works: switch 1, 2, and 3 on position I

Technical Data, Dimensional Data and Weights

Technical Data, Switch Amplifier 1-channel

KFA6-SR2-Ex1.W

Mains

Rated voltage	terminal 14, 15 AC 207 V...253 V, 45 Hz...65 Hz
Safety-related maximum voltage U _m	DC 253 V

Waviness	—
Rated current	—

Power consumption	≤ 1 W
-------------------	-------

Input (intrinsically safe)

Nominal data	terminals 1+, 3-
No-load voltage / short circuit current	according to EN 60 947-5-6 (NAMUR)
Switch point / switching hysteresis	approx. DC 8 V / approx. 8 mA
Input pulse length / -impulse pause	1.2 mA...2.1 mA / approx. 02 mA
Lead control	≥ 20 ms / ≥ 20 ms
	break I ≤ 0.1 mA, short circuit I > 6 mA

Highest values acc. to decl. of conformity

Voltage U ₀	10.6 V
Current I ₀	19 mA
Output P ₀	51 mW

Allowed connection value

Type of protection, category	[EEx ia]
Explosion group	IIB / IIC
External capacity	2.1 µF / 0.59 µF
External inductance	5 mH / 3 mH
Type of protection, category	[EEx ib]
Explosion group	IIB / IIC
External capacity	20 µF / 2.9 µF
External inductance	360 mH / 100 mH

Output (not intrinsically safe)

Output	terminals 7, 8, 9
Contact load	AC: 253 V / 2 A / cos φ > 0,7; DC: 40 V / 2 A ohmic load
Mechanical durability	10 ⁷ switching cycles
On-delay / delayed release	approx. 20 ms / approx. 20 ms

Transfer features

Switching frequency	< 10 Hz
---------------------	---------

Galvanic separation

Input / output	secure galvanic separation according to EN 50 020, peak value of the voltage 375 V
Input / mains	secure galvanic separation according to EN 50 020, peak value of the voltage 375 V
Output / mains	reinforced insulation according to IEC 61 140, rated insulation voltage 300 V _{eff}

Standard conformity

Electromagnetic compatibility	
standard 2004 / 108 / EG	EN 61 326-1:2006

Low voltage

standard 2006 / 95 / EG	EN 50 178: 1997
-------------------------	-----------------

ATEX

standard 94 / 9 / EG	EN 50 014, EN 50 020
----------------------	----------------------

Conformity

Electromagnetic compatibility	NE 21
Protection type	IEC 60 529
Protection against electric shock	IEC 61 140

Environmental conditions

Ambient temperature	-20... 60 °C (253...333 K)
---------------------	----------------------------

Mechanical data

Protection type	IP 20
Weight	approx. 150 g
Dimensions	20 x 119 x 115 mm, case model B2

International approval and others

FM-approval	
Control Drawing	116-0035
UL-approval	
Control Drawing	116-0145
CSA-approval	
Control Drawing	116-0047

Technical changes, replacement of materials and errors excepted.

Technical Data, Dimensional Data and Weights

Technical Data, Switch Amplifier 2-channel		KFA6-SR2-Ex2.W	KFA6-SR2-Ex2.W.IR
Mains			
Rated voltage	terminals 14, 15 AC 207 V...253 V, 45 Hz...65 Hz	terminals 14, 15 AC 207 V...253 V, 45 Hz... 65 Hz	terminals 14, 15 AC 207 V...253 V, 45 Hz... 65 Hz
Safety-related maximum voltage U _m	DC 253	DC 253	DC 253
Waviness	—	—	—
Rated current	—	—	—
Power consumption	≤ 1.3 W	≤ 1.5 W	≤ 1.5 W
Input (intrinsically safe)	terminals 1+, 3-, 4+, 6-	terminals 1+, 2+, 3-, 4+, 5+, 6-	terminals 1+, 2+, 3-, 4+, 5+, 6-
Nominal data	according to EN 60 947-5-6 (NAMUR)		
No-load voltage / short circuit current	approx. DC 8 V / approx. 8 mA		
Switch point / switching hysteresis	1.2 mA...2.1 mA / approx. 0.2 mA		
Input pulse length / -impulse pause	≥ 20 ms / ≥ 20 ms	≥ 10 ms / ≥ 10 ms	≥ 10 ms / ≥ 10 ms
Lead control	break I ≤ 0.1 mA, short circuit I > 6 mA		
Highest values acc. to decl. of conformity	PTB 00 ATEX 2081		
Voltage U ₀	10.6 V	10.6 V	10.6 V
Current I ₀	19 mA	19 mA	19 mA
Output P ₀	51 mW	51 mW	51 mW
Allowed connection value			
Type of protection, category	[EEx ia]		
Explosion group	IIB / IIC	IIB	/ IIC
External capacity	2.1 µF / 0.59 µF	2.1 µF	/ 0.59 µF
External inductance	5 mH / 3 mH	5 mH	/ 3 mH
Type of protection, category	[EEx ib]		
Explosion group	IIB / IIC	IIB	/ IIC
External capacity	20 µF / 2.9 µF	20 µF	/ 2.9 µF
External inductance	360 mH / 100 mH	360 mH	/ 100 mH
Output (not intrinsically safe)			
Output I	terminals 7, 8, 9		
Output II	terminals 10, 11, 12		
Contact load	AC: 253 V / 2 A / cos φ > 0.7; DC: 40 V / 2 A ohmic load		
Mechanical durability	10 ⁷ switching cycles		
On-delay / delayed release	approx. 20 ms / approx. 20 ms		
Transfer features			
Switching frequency	< 10 Hz		
Galvanic separation			
Input / output	secure galvanic separation according to EN 50 020, peak value of the voltage 375 V		
Input / mains	secure galvanic separation according to EN 50 020, peak value of the voltage 375 V		
Output / mains	reinforced insulation according to IEC 61 140, rated insulation voltage 300 V _{eff}		
Output / output	basic insulation according to IEC 61 140, rated insulation voltage 300 V _{eff}		
Standard conformity			
Electromagnetic compatibility			
standard 2004 / 108 / EG	EN 61 326-1:2006		
Low voltage			
standard 2006 / 95 / EG	EN 50 178: 1997		
ATEX			
standard 94 / 9 / EG	EN 50 014, EN 50 020		
Conformity			
Electromagnetic compatibility	NE 21		
Protection type	IEC 60 529		
Protection against electric shock	IEC 61 140		
Environmental conditions			
Ambient temperature	-20... 60 °C (253...333 K)		
Mechanical data			
Protection type	IP 20		
Weight	approx. 150 g		
Dimensions	20 x 119 x 115 mm, case model B2		
International approval			
FM-approval			
Control Drawing	116-0035		
UL-approval			
Control Drawing	116-0145		
CSA-approval			
Control Drawing	116-0047		

Technical changes, replacement of materials and errors excepted.