

# Pressure Transmitters

With piezoresistive measuring cell

Pressure ranges 0-100 mbar to 0-1000 bar

PTM

## Application

Pressure transmitters model PTM are suitable for overpressure- and absolute pressure measurement of liquid and gaseous media of 0-100 mbar up to 0-1000 bar, that do not corrode 1.4571 and 1.4435 (316 stainless steel), as well as Viton.

Two basic model are available:

**Overpressure** 0-100 mbar to 0-1000 bar  
(up to 0-16 bar with ventilation to atmosphere)

**Absolute pressure (a)** 0-100 mbar to 0-1000 bar  
(reference point zero absolute)

The pressure transmitters are temperature-compensated and provide a calibrated output signal.

## Construction

Der piezoresistive sensor is installed in the pressure connection piece and is surrounded by silicone oil. It is separated from the medium by a thin stainless steel diaphragm.

The earth conductor of the plug connector is connected to the case. The attachment of chemical seals, e.g. for the food industry is possible, see data sheets of catalogue-heading 7... .

## Standard Version

### Construction Type

Installation length: standard

### Process Connection

G 1/2 B (1/2" BSP), 1.4571 (316 stainless steel)

### Measuring Cell / Sensor

Piezoresistive measuring cell: 1.4435 (316 stainless steel)  
Diaphragm (placed inside): 1.4435 (316 stainless steel)

### Sensor Sealing

FPM (Viton®)

### Case

1.4301 (304 stainless steel), case protection type IP 65

### Pressure Ranges / Overload

Overpressure- and absolute pressure		
0-100 mbar	0- 4 bar	0- 40 bar
0-160 mbar	0- 6 bar	0- 60 bar
0-250 mbar	0-10 bar	0- 100 bar
0-400 mbar	0-16 bar	0- 160 bar
0-600 mbar	0-25 bar	0- 250 bar
0-1 bar		0- 400 bar
0-1.6 bar		0- 600 bar
0-2.5 bar		0-1000 bar

The corresponding vacuum- / compound gauges are also available.

**Overload** pressure range-dependent, typically at least 2-fold, exact indication upon request

### Output Signal

4 ... 20 mA	2-wire	Power supply	Load impedance
0 ... 20 mA	3-wire	10...40 VDC	(UB - 10V)/0.02 A
0 ... 10 V	3-wire	8...28 VDC	(UB - 8V)/0.02 A
		13...28 VDC	min. 10 kOhm

### Measuring Accuracy

Better than  $\pm 0.5\%$ , of full scale value (including non-linearity, hysteresis and non-repeatability) for measuring spans 100, 160, and 250 mbar  $\pm 1.0\%$

### Temperature Ranges

Storage temperature: -40...+125 °C (-40... +257 °F)  
Rated temperature: -10...+ 80 °C (-14... +176 °F)

### Temperature Influence in the Rated Temperature Range

Zero point: < 0.3 % / 10 K  
Measuring span: < 0.2 % / 10 K



**Mechanical Shock**  
100g/1ms

**Mechanical Vibration**  
max. 20g at 15-2000 Hz

**Reference Temperature**  
20 °C (68 °C)

**Long-term Stability of Zero Point and Span**  
Better than  $\pm 0.25\%$  p.a.

**Reverse Voltage Protection**  
Available

### Electrical Connection

Plug connection 3-pin + protective contact (DIN EN 175301-803)  
For assuring the electromagnetic compatibility (EMC) please use a shielded cable (e.g. LP/LiMYCY). The shield has to be connected to the case resp. to the ground terminal of the terminal box.

**Position of Installation**  
Any

### EMC

EN 61 000-6-3, 61 000-6-2

## Options

- Process connection: - G 1/4 B, 1/4" NPT, 1/2" NPT (EN 837-3), M 12x1.5, M 20x1.5  
- High pressure-connection (female- or male thread)  
- VCR® union nut, VCR® male thread rigid, others upon request
- Electrical connection: - Cable bushing (IP67) with 2m cable  
- Circular plug connector M 12 x 1 (IP67)  
- Angular cable box without cable, optional with 2 m die casted cable  
- Straight cable box without cable, others upon request
- Special version: - Silicone-free version  
- Version free of grease an oil, up to 0-600 bar  
- Adjustment  $\leq 250$  bar with dry air  
-  $\geq 400$  bar with distilled water  
- Oxygen version: up to max. 0-600 bar, restrictor screw in the im inlet port of the connection, orifice  $\varnothing 0.3$  mm  
- Output signal 0-5 V or 1-10 V, 4-20 mA (3-wire)  
- Other sensor sealing

## Ordering Information

Please specify in your order:

### Basic model

**Order code** for absolute pressure

**Pressure range**

**Output signal**

Possible specifics:

PTM

(a)

e.g. 0-6 bar

e.g. 4...20 mA

compare above

**Example: PTM (a), 0-1 bar, 4...20 mA**



Sales and Export South, West, North

**ARMATURENBAU GmbH**

Manometerstraße 5 • D-46487 Wesel - Ginderich  
Tel.: +49(0) 28 03 / 91 30-0 • Fax: +49(0) 28 03 / 10 35  
armaturenbau.com • mail@armaturenbau.com

Subsidiary Company, Sales and Export East

**MANOTHERM Beierfeld GmbH**


Am Gewerbepark 9 • D-08344 Grünhain-Beierfeld  
Tel.: +49(0) 37 74 / 58-0 • Fax: +49(0) 37 74 / 58-545  
manotherm.com • mail@manotherm.com

**9810**

12/12

# Case Configuration, Dimensional Data and Weights, Wiring Diagram

## PTM

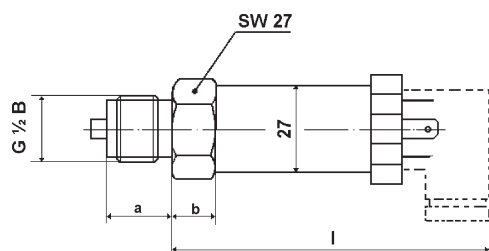

### Dimensional Data (mm) and Weights (kg)

Model	Variant	l (mm)	a (mm)	b (mm)	approx. weight
PTM	up to 0-100 bar	88 (93)	20	10	0.21 kg
	> 0-160 bar	97 (102)	20	19	0.23 kg

The values in brackets are for the output signals 0...20 mA

### Wiring Diagram

